

VOLVO EXCAVATORS

EC220D

20.9-24.4 t 167 hp



NEW LEVELS OF FUEL EFFICIENCY.



ECO mode

Volvo's unique ECO mode contributes to up to 5% of the machine's total improved fuel efficiency – without any loss of performance in most operating conditions. The design features electronic pump control technology which reduces flow and pressure losses while maintaining digging power and maximizing swing torque.

Volvo proudly introduces the EC220D and the next generation of fuel efficiency. Thanks to sophisticated technology this excavator boasts a 10% improvement in fuel efficiency compared to the previous model. With Volvo's unique ECO mode, a new hydraulic system and a premium Volvo D6 diesel engine, you'll soon start to reap the benefits of reduced operational costs. Maximize your fuel efficiency with Volvo.

Volvo D6 engine

Volvo's state-of-the art D6 diesel engine is seamlessly integrated with all excavator systems. The premium, six cylinder engine delivers high performance and low fuel consumption. The D6 is available in two versions to comply with regional emission regulations.

Auto engine shutdown

The optional auto engine shutdown function automatically turns the engine off to reduce fuel consumption when the machine is inactive for a preset amount of time (five minutes is the default setting). The operator is informed one minute before this occurs.



Fuel consumption display

A new gauge bar on the I-ECU measures instantaneous fuel consumption while average fuel consumption is displayed numerically per hour. This allows you to monitor fuel usage on different job sites and applications.



Work modes

Volvo's unique, integrated work mode system now includes the G4 mode for optimum fuel efficiency and machine performance. Operators can choose the best work mode to suit the task at hand – simply select from I (Idle), F (Fine), G (General), H (Heavy) and P (Power max) mode.

DESIGNED FOR PRODUCTIVITY.

The new, modern D-series styling of the EC220D cab puts the operator in control facilitating optimal conditions for productivity. With superior visibility, easy to access controls and built in comfort, it's no wonder operators experience less fatigue and feel more productive in this spacious and safe working environment. See more and do more with Volvo.

Climate control system

Operators can set their ideal temperature with Volvo's powerful climate control system which is integrated into the I-ECU. Industry-leading air circulation and defrosting is delivered quickly via 14 well-spaced vents for increased comfort and productivity.



I-ECU monitor

The new, color LCD monitor displays machine status information including fuel consumption details and service interval alerts. The large, anti-glare, tiltable screen and conveniently placed navigation controls facilitate easy operation and high productivity.



ROPS

Volvo recommends an optional Roll Over Protective Structure (ROPS) certified cab when working in challenging applications. This provides increased operator safety in the unlikely event of machine roll over.



Cab

All-around visibility and an excellent operator environment are at the center of Volvo's cab design. The EC220D features new Volvo styling. The spacious and safe environment has been built strong and includes slim cab pillars, large expanses of glass, an adjustable seat and easy to access controls for reduced fatigue and increased productivity.

PREMIUM PERFORMANCE.



Electro-hydraulic system

New electro-hydraulic system and main control valve (MCV) use intelligent technology to control on-demand flow and reduce internal losses in the hydraulic circuit. This provides increased controllability, shorter cycle times and improved fuel efficiency.

Featuring a new electro-hydraulic system, the EC220D provides you with the power, controllability and versatility you need, when you need it. Whether you're working in the road construction, quarry, trenching or any other application, this machine will surpass your expectations.

Improved controllability

Grading and combined operations are improved thanks to Volvo's smart hydraulic system which increases controllability. Benefit from smoother and easier movement when traveling and lifting simultaneously as well as better grading quality from the harmonized boom and arm movement.

Attachment Management System

The Attachment Management System (AMS) - controlled through the I-ECU - stores settings for up to 20 hydraulic attachments. The system can store flow, maximum pressure, single or double acting circuit, on/off or proportional control - increasing versatility and convenience.



Boom float option

Enables the boom to 'float' over the ground without pressure in the boom cylinders. Pump power is not used to lower the boom so there is more power available for other functions - like faster cycle times. The boom float provides easy controllability in grading and eliminates excessive shock when using a breaker.

Pressure preset

For ease of use, this system allows the operator to set the pressure through the I-ECU monitor. The settings can be stored in the Attachment Management System (AMS).

USER-FRIENDLY SERVICE ACCESS.


Access greater uptime and spend longer working on the jobsite with the EC220D. With safe and easy access to centralized filters and grouped greasing points, you'll spend less time maintaining your machine and more time earning money with Volvo.

Cooling system

The radiator, charged air cooler and hydraulic oil cooler are situated side-by-side on a single layer to maximize efficiency, reduce blockages and aid cleaning. The system is easily accessed for maintenance by simply opening the side door from ground level.

Extra water separator

An additional water separator is available to further prevent water from entering the engine and impurities from contaminating the fuel. This feature provides increased water separation and filtration capacity for extra durability and reliability.

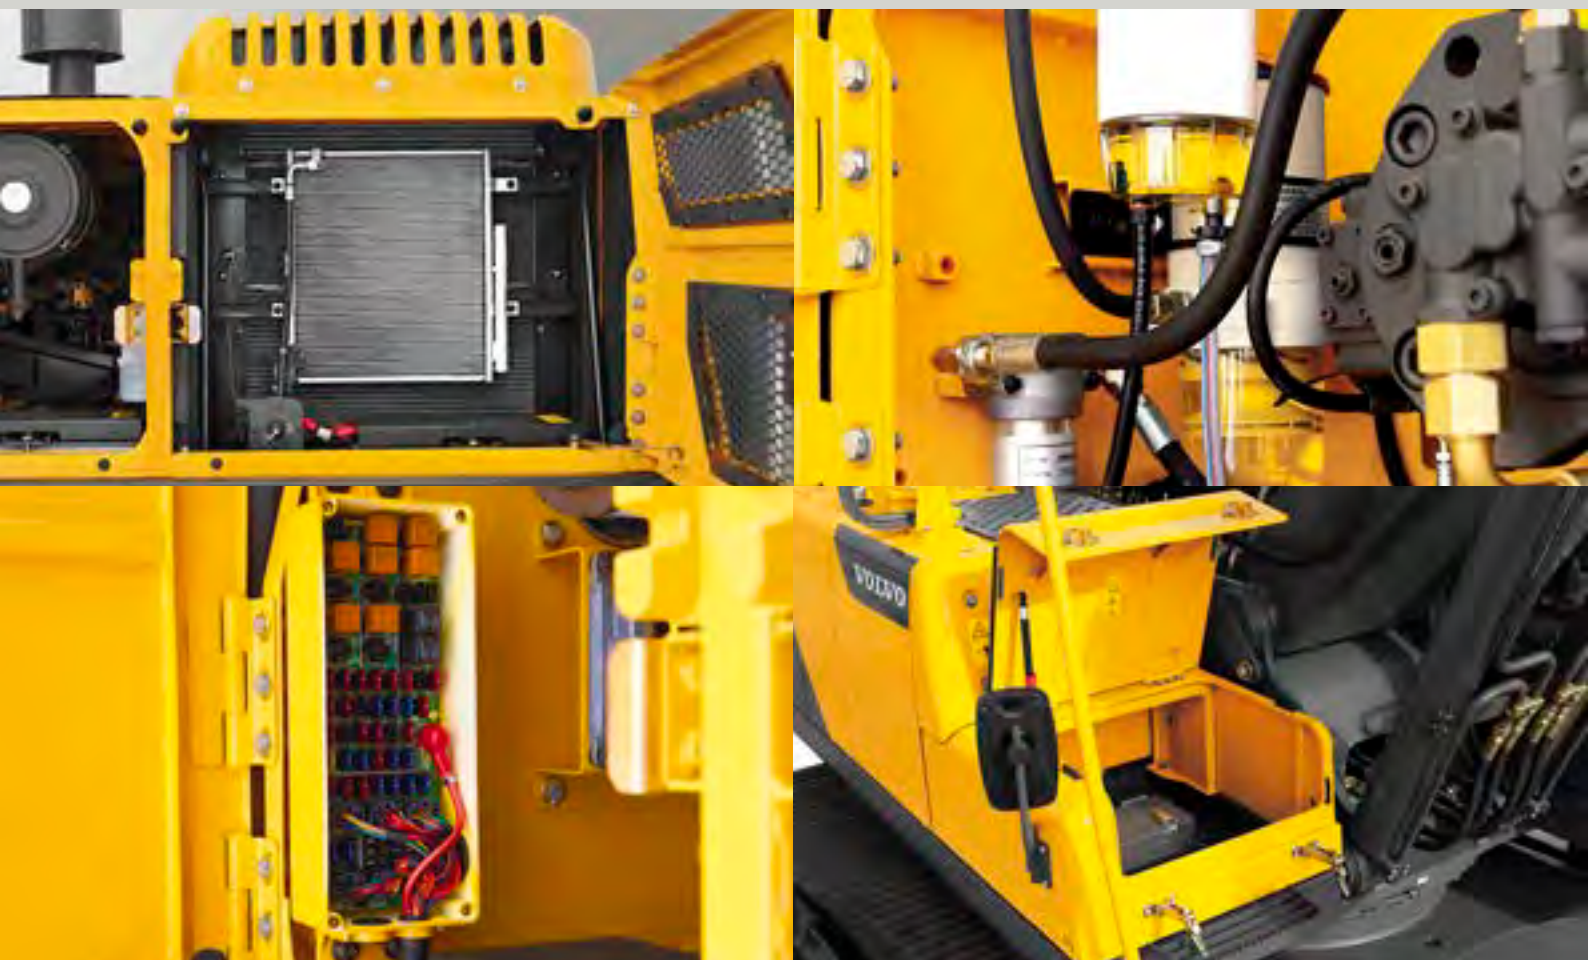

Electrical Distribution Box

The fully-sealed Electrical Distribution Box contains all fuses and relays – inside the box cover these are identified on a map. The Volvo design protects against dirt and moisture for more machine uptime. It is accessible from ground level for easy service access.

Toolbox

Tools and a grease can are stored inside a spacious, well-designed toolbox for easy service access and more machine uptime.



Service access

Large doors and engine hood – which can be fully opened – provide easy service access to components. Centralized filters and greasing points allow regular checks to be done faster for maximum machine uptime and productivity. Durable, steel anti-slip plates ensure safe access for maintenance in more weather conditions and over time.

ADDING VALUE TO YOUR BUSINESS.

Being a Volvo customer means having a complete set of services at your fingertips. Volvo can offer you a long-term partnership, protect your revenue and provide a full range of customer solutions using high quality parts, delivered by passionate people. Volvo is committed to the positive return of your investment.



Complete Solutions

Volvo has the right solution for you. So why not let us provide all your needs throughout the whole life cycle of your

machine? By listening to your requirements, we can reduce your total cost of ownership and increase your revenue.




Genuine Volvo Parts

Our attention to detail is what makes us stand out. This proven concept acts as a solid investment in your machine's future. Parts are extensively tested and approved because every part is vital for uptime and performance. Only by using Genuine Volvo Parts, can you be sure that your machine retains the renowned Volvo quality.




Service Network


In order to respond to your needs faster, a Volvo expert is on their way to your job site from one of our Volvo facilities. With our extensive infrastructure of technicians, workshops and dealers, Volvo has a comprehensive network to fully support you using local knowledge and global experience.

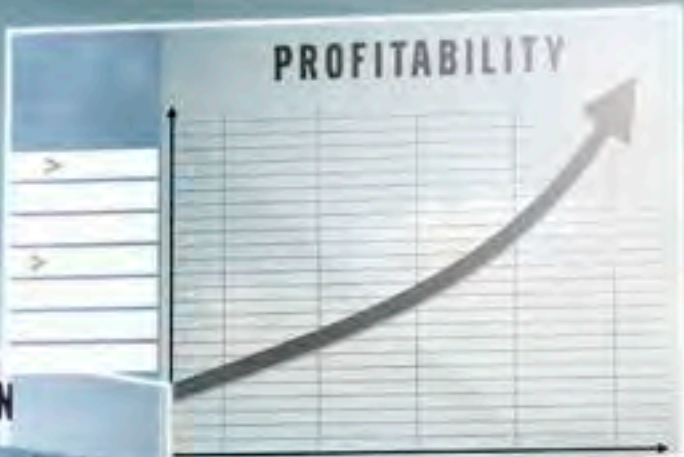

SERVICE PLAN

DAY01	DAY02	DAY03	DAY04	DAY05	DAY06	DAY07
						✓
			✓	✓		
✓						✓
		✓				✓
✓						
		✓				

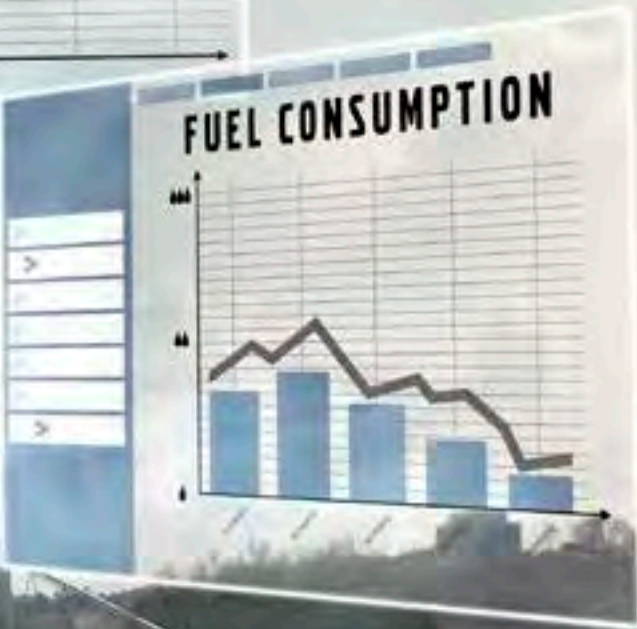

 **Customer Support Agreements**

The range of Customer Support Agreements offer preventive maintenance, total repairs and a number of uptime services. Volvo uses the latest technology to monitor machine operation and status, giving you advice to increase your profitability. By having a Customer Support Agreement you are in control of your service costs.

A QUALITY NEW DESIGN.

Engine D6

Premium Volvo D6 diesel engine built with proven, advanced technology for high performance and low fuel consumption.



New I-ECU

The large, color LCD monitor clearly displays machine status information for easy operation and increased productivity.



ECO mode

Volvo's unique ECO mode contributes to up to 5% of the machine's total improved fuel efficiency without any loss of performance.



Cab design

All-around visibility, safety, comfort and easy to access controls are at the center of Volvo's operator environment.



Service access

Large doors and engine hood provide easy service access. Centralized filters and greasing points allow regular checks to be done faster.

Boom float

This option enables the boom to 'float' over the ground for easy controllability in grading and breaker operations.





Boom and arm

Proven Volvo design and manufacturing process, incorporating high strength tensile steel, provides maximum durability and uptime.

New D-series styling

The EC220D boasts new, modern D-series styling consistent with Volvo's product family.



Electro-hydraulic system

New electro-hydraulic system and MCV use intelligent technology to control on-demand flow for improved performance and efficiency.

New work modes

Volvo's unique work mode system now includes the G4 mode for optimum fuel efficiency and performance.



Customer solutions

Volvo provides the right solutions throughout the entire life cycle of your machine to lower total cost of ownership

Attachment Management System

The Attachment Management System (AMS) - controlled through the I-ECU - stores settings for up to 20 different hydraulic attachments.

Breaker / shear piping

Volvo designed hydraulic breaker / shear piping option provides optimum flow to the hydraulic attachments.

GET THE MOST FROM YOUR EXCAVATOR.

Maximize your excavator's productivity and profitability with Volvo's comprehensive range of attachments – designed to work in perfect harmony with Volvo machines. Access more applications and effectively perform a variety of tasks while experiencing reduced fuel consumption and reduced cycle times.



Volvo buckets

Volvo offers a range of high quality buckets designed to perform in a variety of materials. Featuring exceptional design and built in durability, Volvo buckets efficiently handle the toughest of jobs.

Hydraulic breakers

Volvo hydraulic breakers have been built to break the most demanding materials. With consistent power and high breaking force you'll benefit from maximum impact and durability. Set your Volvo breaker at the right frequency to suit your application needs.

INTERFACES



S1 and S2 quick couplers

Volvo's dedicated quick couplers are the ideal choice when you need high performance as well as the ability to easily switch between various attachments – including a tiltrotator. The lightweight design features a low build height and a tight fit to the attachment.



Universal quick coupler

For ultimate flexibility, the universal quick coupler picks up a wide range of both Volvo and other brand attachments. The coupler can be used with buckets in both the face shovel and backhoe position.



Direct fit

For maximum productivity when only operating in one application, Volvo's direct fit attachments provide the best performance and shortest tip radius.

BUCKETS & GROUND ENGAGING TOOLS



General purpose bucket

The perfect tool for digging and re-handling soft to medium material such as dirt, sand and loose clay soils.



Heavy-duty bucket

This bucket excels at digging compact materials including loose rock, hard clay and gravel. It can be used in applications such as quarrying or mining.



Volvo Tooth System

Volvo's robust range of teeth and adapters are designed to cover all applications.



Fixed ditching bucket

Ideal for ditch cleaning, grading, contouring, landscaping, backfilling and removing soft materials.



Tiltable ditching bucket

This bucket can be tilted 45° to each side making it ideal for use on slopes. It can be used for ditch cleaning, grading, contouring, landscaping, backfilling and removing soft materials.



Wear parts

For increased durability, Volvo provides segments, side shrouds, bottom shrouds, teeth, side cutters and bolt-on edges.

HYDRAULIC BREAKERS



Breaker package

The all-in-one hydraulic breaker package includes everything you need to start using your breaker. Depending on the machine, it contains a breaker, hydraulic hoses, a breaker bracket and tool.



Breaker Tools

Volvo hydraulic breakers can be used in a variety of applications. To ensure optimum performance in your application select the right breaker tool from the range.

VOLVO EC220D IN DETAIL.

Engine

The engine, which provide excellent performance, is equipped with six cylinder, vertical, electronic-controlled high pressure fuel injectors, internal EGR* (*for certain regions), 6 liter in-line waste gate turbo charger, air-to-air intercooler and water cooled diesel engine type.

Engine	Volvo	D6E
Max power at	r/s / r/min	30 / 1 800
Net, ISO 9249/SAE J1349	kW / hp	115 / 156
Gross, ISO 14396/SAE J1995	kW / hp	123 / 167
Max torque at	Nm/ r/min	730 / 1 350
No. of cylinders		6
Displacement	l	5.7
Bore	mm	98
Stroke	mm	126

Electrical system

High-capacity electrical system that is well protected. Waterproof double-lock harness plugs are used to secure corrosion-free connections. The main relays and solenoid valves are shielded to prevent damage. The master switch is standard. Advanced monitoring of machine functions and important diagnostic information is displayed on the I-ECU.

Voltage	V	24
Battery capacity	V / Ah	2 x 12 / 150
Alternator	V / Ah	28 / 80
Start motor	V / kW	24 / 5.5

Swing system

The swing system uses an axial piston motors, driving a planetary gearbox for maximum torque. An automatic holding brake and anti-rebound valve are standard.

Max. slew speed	r/min	12.1
Max. slew torque	kNm	76.7

Drive

Each track is powered by an automatic two-speed shift travel motor. The track brakes are multi-disc, spring-applied and hydraulic released. The travel motor, brake and planetary gears are well protected within the track frame.

Max. travel speed (low / high)	km/h	3.5 / 5.7
Max. drawbar pull	kN	183
Gradeability	°	35

Undercarriage

The undercarriage has a robust X-shaped frame. Greased and sealed track chains are standard.

EC220D		
Track shoe		2 x 46
Link pitch	mm	190
Shoe width, triple grouser	mm	600/700/800/900
Shoe width, triple grouser (HD)	mm	600
Shoe width, double grouser	mm	-
Bottom rollers		2 x 7
Top rollers		2 x 2
EC220DL		
Track shoe		2 x 49
Link pitch	mm	190
Shoe width, triple grouser	mm	500/600/700/800/900
Shoe width, triple grouser (HD)	mm	600
Shoe width, double grouser	mm	700
Bottom rollers		2 x 8
Top rollers		2 x 2
EC220DLR		
Track shoe		2 x 49
Link pitch	mm	190
Shoe width, triple grouser	mm	800/900
Shoe width, triple grouser (HD)	mm	-
Shoe width, double grouser	mm	-
Bottom rollers		2 x 8
Top rollers		2 x 2

Hydraulic system

The new electro-hydraulic system and new MCV (main control valve) use intelligent technology to control on-demand flow for high-productivity, high-digging capacity and excellent fuel economy. The summation system, boom, arm and swing priority along with boom, arm and bucket regeneration provides optimum performance.

The following important functions are included in the system:

Summation system: Combines the flow of both hydraulic pumps to ensure quick cycle times and high productivity.

Boom priority: Gives priority to the boom operation for faster raising when loading or performing deep excavations.

Arm priority: Gives priority to the arm operation for faster cycle times in leveling and for increased bucket filling when digging.

Swing priority: Gives priority to swing functions for faster simultaneous operations.

Regeneration system: Prevents cavitation and provides flow to other movements during simultaneous operations for maximum productivity.

Power boost: All digging and lifting forces are increased.

Holding valves: Boom and arm holding valves prevent the digging equipment from creeping.

Main pump, Type 2 x variable displacement axial piston pumps		
Maximum flow	l/min	2 x 207
Pilot pump, Type Gear pump		
Maximum flow	l/min	1 x 18
Relief valve setting		
Implement	MPa	34.3 / 36.3
Travel circuit	MPa	34.3
Slew circuit	MPa	27.9
Pilot circuit	MPa	3.9

Hydraulic cylinders

Mono boom		2
Bore x Stroke	ø x mm	125 x 1 235
Arm		1
Bore x Stroke	ø x mm	135 x 1 540
Bucket		1
Bore x Stroke	ø x mm	120 x 1 065
Bucket for long reach		1
Bore x Stroke	ø x mm	100 x 865

Service refill capacities

Fuel tank	l	375
Hydraulic system, total	l	295
Hydraulic tank	l	140
Engine oil	l	25
Engine coolant	l	32
Swing reduction unit	l	8.6
Travel reduction unit	l	2 x 5.8

Cab

The operator's cab has easy access via a wide door opening. The cab is supported on hydraulic dampening mounts to reduce shock and vibration levels. These along with sound absorbing lining provide low noise levels. The cab has excellent all-round visibility. The front windshield can easily slide up into the ceiling, and the lower front glass can be removed and stored in the side door.

Integrated air-conditioning and heating system:

The pressurized and filtered cab air is supplied by an automatically-controlled fan. The air is distributed throughout the cab from 14 vents. Ergonomic operator's seat: The adjustable seat and joystick console move independently to accommodate the operator. The seat has nine different adjustments plus a seat belt for the operator's comfort and safety.

Sound Level

Sound level in cab according to ISO 6396		
LpA (standard / tropical)	dB(A)	70 / 70
External sound level according to ISO 6395 and EU Noise Directive (2000/14/EC) and 474-1:2006 +A1:2009		
LwA (standard / tropical)	dB(A)	103 / 105

SPECIFICATIONS.

BUCKET SELECTION GUIDE

Bucket type		Capacity	Cutting width	Weight	Teeth	EC220D				EC220DL			
						5.7m Boom							
						600mm shoe, 4 200kg counterweight							
		L	mm	kg	EA	2.0m	2.5m	2.9m	3.5m	2.0m	2.5m	2.9m	3.5m
Direct fit Buckets	General purpose	480	600	638	3	C	C	C	C	C	C	C	C
		920	1 050	834	4	C	C	C	C	C	C	C	C
		970	1 100	857	4	C	C	C	C	C	C	C	C
		1 090	1 200	923	5	C	C	C	B	C	C	C	C
		1 270	1 350	1 010	5	C	B	B	A	C	C	C	B
	Heavy duty	1 440	1 500	1 100	6	B	B	A	X	C	B	B	A
		920	1 050	898	4	D	D	D	D	D	D	D	D
		1 090	1 200	983	5	D	D	C	B	D	D	D	C
		1 270	1 350	1 066	5	C	B	B	A	D	D	C	B

Please consult with your Volvo dealer for the proper match of buckets and attachments to suit the application.

The recommendations are given as a guide only, based on typical operation conditions.

Bucket capacity based on ISO 7451, heaped material with a 1:1 angle of repose.

X : Not recommended

Maximum material density


A	1 200~1 300 kg/m ³	Coal, Caliche, Shale
B	1 400~1 600 kg/m ³	Wet earth and clay, Limestone, Sandstone
C	1 700~1 800 kg/m ³	Granite, Wet sand, Well blasted rock
D	1 900 kg/m ³ ~	Wet mud, Iron ore

MACHINE WEIGHTS AND GROUND PRESSURE

EC220D					5.7m boom 2.9m arm				5.7m boom 2.9m arm			
					770kg (920l) bucket 3 700kg counterweight				770kg (920l) bucket 4 200kg counterweight			
Description	Shoe width	Operating weight	Ground pressure	Overall width	Shoe width	Operating weight	Ground pressure	Overall width	Shoe width	Operating weight	Ground pressure	Overall width
	mm	kg	kPa	mm	mm	kg	kPa	mm	mm	kg	kPa	mm
Triple grouser	600	21 000	47.1	2 800	600	21 500	48.0	2 800	600	21 500	48.0	2 800
	HD 600	21 160	47.1	2 800	HD 600	21 660	48.0	2 800	HD 600	21 660	48.0	2 800
	700	21 430	41.2	2 900	700	21 930	42.2	2 900	700	21 930	42.2	2 900
	800	21 700	36.3	3 000	800	22 200	37.3	3 000	800	22 200	37.3	3 000
	900	21 980	32.4	3 100	900	22 480	33.3	3 100	900	22 480	33.3	3 100
EC220DL					5.7m boom 2.9m arm				5.7m boom 2.9m arm			
					890kg (1 000l) bucket 3 700kg counterweight				890kg (1 000l) bucket 4 200kg counterweight			
Description	Shoe width	Operating weight	Ground pressure	Overall width	Shoe width	Operating weight	Ground pressure	Overall width	Shoe width	Operating weight	Ground pressure	Overall width
	mm	kg	kPa	mm	mm	kg	kPa	mm	mm	kg	kPa	mm
Triple grouser	500	21 130	53.0	2 890	500	21 630	53.9	2 890	500	21 630	53.9	2 890
	600	21 390	44.1	2 990	600	21 890	45.1	2 990	600	21 890	45.1	2 990
	HD 600	21 650	45.1	2 990	HD 600	22 150	46.1	2 990	HD 600	22 150	46.1	2 990
	700	21 940	39.2	3 090	700	22 440	40.2	3 090	700	22 440	40.2	3 090
	800	22 220	34.3	3 190	800	22 720	35.3	3 190	800	22 720	35.3	3 190
Double grouser	900	22 520	31.4	3 290	900	23 020	31.4	3 290	900	23 020	31.4	3 290
	700	22 220	39.2	3 090	700	22 720	40.2	3 090	700	22 720	40.2	3 090
EC220DLR					8.85m boom 6.25m arm							
					460kg (520l) bucket 4 900kg counterweight							
Description	Shoe width	Operating weight	Ground pressure	Overall width								
	mm	kg	kPa	mm								
Triple grouser	800	23 710	37.3	3 190								
	900	23 990	33.3	3 290								

SPECIFICATIONS.

WORKING RANGES

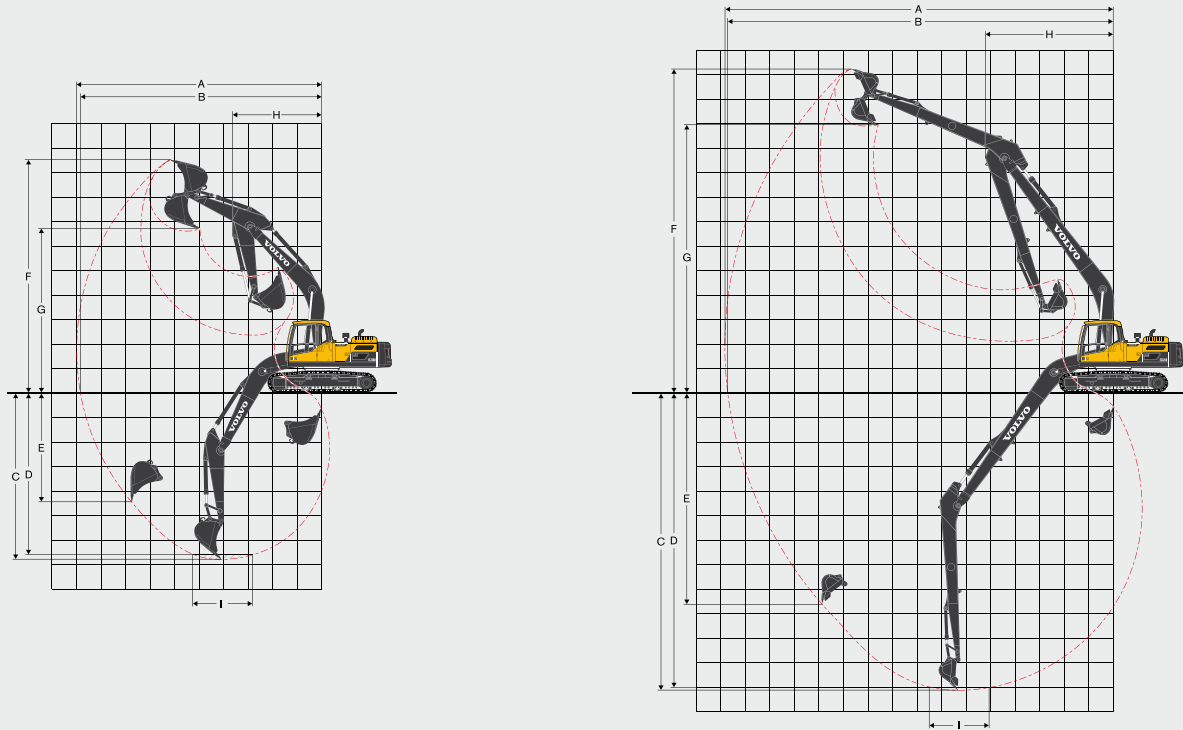


Description		Unit	EC220D and EC220DL				EC220DLR	
Boom		m	5.7				8.85	
Arm		m	2.0	2.5	2.9	3.5	6.25	
A	Max. digging reach	mm	9 090	9 550	9 930	10 390	15 800	
B	Max. digging reach on ground	mm	8 910	9 380	9 770	10 240	15 700	
C	Max. digging depth	mm	5 830	6 330	6 730	7 330	12 100	
D	Max. digging depth (l = 2440 mm level)	mm	5 560	6 100	6 540	7 130	12 000	
E	Max. vertical wall digging depth	mm	4 880	5 620	6 090	6 470	11 290	
F	Max. cutting height	mm	8 940	9 220	9 460	9 460	13 300	
G	Max. dumping height	mm	6 190	6 430	6 650	6 700	10 950	
H	Min. front swing radius	mm	3 790	3 670	3 640	3 660	5 200	
Digging forces with direct fit bucket								
Bucket radius		mm	1 470	1 470	1 470	1 470	1 250	
Breakout force - bucket	Normal	SAE J1179	kN	151	130	130	130	68
	Power boost	SAE J1179	kN	160	137	137	137	-
	Normal	ISO 6015	kN	168	145	145	145	77
	Power boost	ISO 6015	kN	178	153	153	153	-
Tearout force - dipper arm	Normal	SAE J1179	kN	146	119	102	93	44
	Power boost	SAE J1179	kN	155	125	108	98	-
	Normal	ISO 6015	kN	150	122	105	95	45
	Power boost	ISO 6015	kN	159	129	111	100	-
Rotation angle, bucket		°	175	175	175	175	175	178

DIMENSIONS

EC220D		Boom			Arm					
Description	Unit	5.7	HD 5.7	Long reach 8.85	2.0	2.5	2.9	HD 2.9	3.5	Long reach 6.25
Length (A)	mm	5 910	5 910	9 060	3 065	3 525	3 910	3 910	4 540	7 330
Height (B)	mm	1 585	1 585	1 460	980	860	860	860	855	945
Width	mm	670	670	670	440	440	440	440	440	385
Weight	kg	1 995	2 135	2 510	1 091	1 129	1 121	1 176	1 226	1 309

Boom includes cylinder, piping and pin, excludes boom cylinder Pin | Arm includes cylinder, linkage and pin

DIMENSIONS

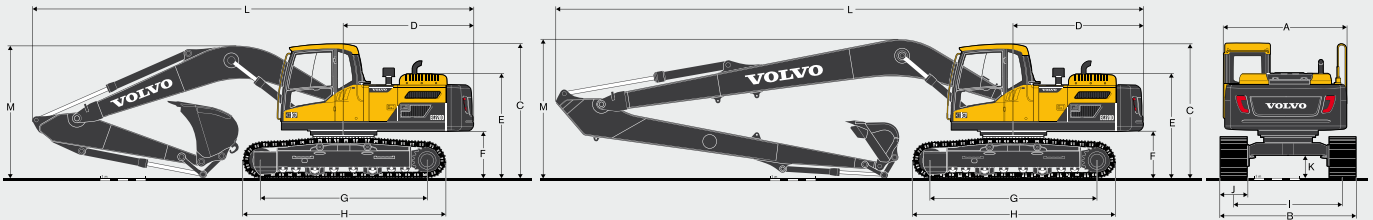

Description	Unit	EC220D				EC220DL				EC220DLR
		5.7				5.7				8.85
Boom	m	2.0	2.5	2.9	3.5	2.0	2.5	2.9	3.5	6.25
Arm	m	2.0	2.5	2.9	3.5	2.0	2.5	2.9	3.5	6.25
A Overall width of upper structure	mm	2 700	2 700	2 700	2 700	2 700	2 700	2 700	2 700	2 700
B Overall width	mm	2 800	2 800	2 800	2 800	2 990	2 990	2 990	2 990	3 190
C Overall height of cab	mm	2 930	2 930	2 930	2 930	2 930	2 930	2 930	2 930	2 930
D Tail slew radius	mm	2 850	2 850	2 850	2 850	2 850	2 850	2 850	2 850	2 850
E Overall height of engine hood	mm	2 315	2 315	2 315	2 315	2 315	2 315	2 315	2 315	2 315
F Counterweight clearance *	mm	1 025	1 025	1 025	1 025	1 025	1 025	1 025	1 025	1 050
G Tumbler length	mm	3 370	3 370	3 370	3 370	3 660	3 660	3 660	3 660	3 660
H Track length	mm	4 160	4 160	4 160	4 160	4 460	4 460	4 460	4 460	4 460
I Track gauge	mm	2 200	2 200	2 200	2 200	2 390	2 390	2 390	2 390	2 390
J Shoe width	mm	600	600	600	600	600	600	600	600	800
K Minimum ground clearance *	mm	460	460	460	460	460	460	460	460	460
L Overall length	mm	9 795	9 745	9 690	9 720	9 795	9 745	9 690	9 720	12 880
M Overall height of boom	mm	3 100	3 080	2 940	3 260	3 100	3 080	2 940	3 260	3 055

* Without shoe grouser

LIFTING CAPACITY EC220D

Lifting capacity at the arm end without bucket.

For lifting capacity including bucket, simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

	Lifting point	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		Max. reach			
		Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	mm	
Boom 5.7m	7.5 m	kg											*6 280	6 230	4 933
Arm 2.0m	6.0 m	kg						*6 030	4 490				*6 080	4 120	6 305
Shoe 600mm	4.5 m	kg				*7 680	6 770	*6 430	4 350				5 100	3 310	7 102
CWT 3 700kg	3.0 m	kg				*9 670	6 190	6 470	4 120	4 580	2 940		4 560	2 930	7 516
	1.5 m	kg						6 230	3 910	4 490	2 860		4 390	2 800	7 611
	0 m	kg					9 510	5 640	6 100	3 790			4 530	2 870	7 399
	-1.5 m	kg					9 530	5 670	6 090	3 780			5 050	3 190	6 852
	-3.0 m	kg			*13 360	11 220	9 710	5 810					6 440	4 030	5 872
Boom 5.7m	7.5 m	kg											*5 650	5 110	5 627
Arm 2.5m	6.0 m	kg						*5 480	4 610				5 560	3 650	6 857
Shoe 600mm	4.5 m	kg				*6 970	6 950	*5 990	4 440	4 730	3 080		4 630	3 010	7 596
CWT 3 700kg	3.0 m	kg				*8 970	6 360	6 550	4 190	4 630	2 990		4 190	2 700	7 983
	1.5 m	kg					9 770	5 870	6 280	3 950	4 510	2 880	4 040	2 580	8 073
	0 m	kg					9 510	5 640	6 110	3 800	4 430	2 800	4 140	2 620	7 874
	-1.5 m	kg			*10 860	10 790	9 470	5 610	6 050	3 750			4 540	2 870	7 362
	-3.0 m	kg			*14 650	11 000	9 600	5 720	6 140	3 830			5 540	3 480	6 463
	-4.5 m	kg			*11 300	*11 300	*8 070	6 010					*7 100	5 250	4 961
Boom 5.7m	7.5 m	kg						*5 130	4 670				*4 910	4 430	6 174
Arm 2.9m	6.0 m	kg						*5 030	4 670				*4 570	3 290	7 311
Shoe 600mm	4.5 m	kg						*5 600	4 490	4 770	3 110		4 260	2 760	8 006
CWT 3 700kg	3.0 m	kg				*8 350	6 470	*6 510	4 230	4 640	3 000		3 890	2 490	8 375
	1.5 m	kg				9 850	5 920	6 300	3 970	4 500	2 870		3 750	2 380	8 460
	0 m	kg			*5 420	*5 420	9 500	5 630	6 090	3 780	4 400	2 770	3 830	2 410	8 270
	-1.5 m	kg	*6 260	*6 260	*10 320	*10 320	9 410	5 550	6 010	3 700	4 370	2 740	4 150	2 610	7 786
	-3.0 m	kg	*11 380	*11 380	*15 460	10 810	9 490	5 620	6 050	3 740			4 930	3 100	6 943
	-4.5 m	kg			*12 560	11 210	*8 920	5 850					*6 820	4 350	5 577

Notes: 1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities. 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting capacity Standards. 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.

LIFTING CAPACITY EC220DL

Lifting capacity at the arm end without bucket.

For lifting capacity including bucket, simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

	Lifting point	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		Max. reach							
		Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	mm					
Boom 5.7m Arm 2.0m Shoe 800mm CWT 3 700kg	7.5 m kg														*6 280	*6 280	4 933		
	6.0 m kg														*6 080	4 670	6 305		
	4.5 m kg							*7 680	*7 680	*6 030	5 090				5 910	3 780	7 102		
	3.0 m kg							*9 670	7 120	*7 240	4 720	5 320	3 380		5 310	3 360	7 516		
	1.5 m kg									7 300	4 500	5 230	3 290		5 120	3 220	7 611		
	0 m kg									11 350	6 560	7 160	4 380		5 280	3 300	7 399		
	-1.5 m kg									*11 190	6 590	7 150	4 370		5 910	3 680	6 852		
-3.0 m kg				*13 360	13 250			*9 930	6 740						*7 360	4 640	5 872		
Boom 5.7m Arm 2.5m Shoe 800mm CWT 3 700kg	7.5 m kg														*5 650	*5 650	5 627		
	6.0 m kg														*5 570	4 140	6 857		
	4.5 m kg									*5 480	5 210				5 360	3 440	7 596		
	3.0 m kg									*8 970	7 290	*6 870	4 790	5 480	3 510	4 870	3 090	7 983	
	1.5 m kg									*10 710	6 790	7 350	4 550	5 250	3 310	4 700	2 970	8 073	
	0 m kg									11 360	6 560	7 170	4 390	5 170	3 230	4 820	3 030	7 874	
	-1.5 m kg				*10 860	*10 860				11 320	6 530	7 120	4 340			5 300	3 310	7 362	
-3.0 m kg				*14 650	13 020				*10 490	6 640	7 200	4 420			6 480	4 020	6 463		
-4.5 m kg				*11 300	*11 300				*8 070	6 940					*7 100	6 050	4 961		
Boom 5.7m Arm 2.9m Shoe 800mm CWT 3 700kg	7.5 m kg														*4 910	*4 910	6 174		
	6.0 m kg														*5 030	*5 030	7 311		
	4.5 m kg														*5 600	5 100	8 006		
	3.0 m kg									*8 350	7 410	*6 510	4 830	5 390	3 430	4 520	2 860	8 375	
	1.5 m kg									*10 250	6 850	7 370	4 560	5 250	3 300	4 370	2 750	8 460	
	0 m kg				*5 420	*5 420				*11 290	6 550	7 160	4 370	5 140	3 200	4 460	2 790	8 270	
	-1.5 m kg				*6 260	*6 260				*10 320	*10 320	11 250	6 470	7 070	4 290	5 110	3 170	4 850	3 020
-3.0 m kg				*11 380	*11 380				*15 460	12 820	*10 790	6 540	7 110	4 330			5 770	3 580	6 943
-4.5 m kg									*12 560	*12 560	*8 920	6 780					*6 820	5 010	5 577
Boom 5.7m Arm 3.5m Shoe 800mm CWT 3 700kg	7.5 m kg														*4 270	*4 270	6 792		
	6.0 m kg														*4 620	3 700	7 837		
	4.5 m kg														*5 030	*5 030	8 488		
	3.0 m kg														*4 830	3 630	9 336		
	1.5 m kg														*5 300	3 490	8 836		
	0 m kg				*7 100	*7 100				*9 530	7 020	*7 060	4 640	5 290	3 340	4 060	2 560	8 917	
	-1.5 m kg				*6 270	*6 270				*10 930	6 620	7 200	4 410	5 160	3 220	4 120	2 580	8 738	
-3.0 m kg				*10 200	*10 200				*11 160	6 470	*7 050	4 270			5 110	3 180	7 496		
-4.5 m kg				*15 240	*15 240				*14 190	12 970	*9 870	6 630	*7 140	4 400			*6 710	4 170	6 255

Notes: 1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities. 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards. 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.

LIFTING CAPACITY EC220DLR

Lifting capacity at the arm end without bucket.

For lifting capacity including bucket, simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

	Lifting point	6.0 m		7.5 m		9.0 m		10.5 m		12.0 m		13.5 m		Along	Across	mm		
		Along	Across	Along	Across	Along	Across	Along	Across	Along	Across							
Boom 8.85m Arm 6.25m Shoe 800mm CWT 4 900kg	12.0 m kg															*880	*880	10 291
	10.5 m kg															*810	*810	11 610
	9.0 m kg															*760	*760	12 612
	7.5 m kg															*740	*740	13 370
	6.0 m kg															*2 330	*2 330	13 923
	4.5 m kg															*2 750	*2 750	14 297
	3.0 m kg															*2 160	*2 160	14 504
	1.5 m kg															*2 140	1 910	14 553
	0 m kg															*2 550	2 300	14 445
	-1.5 m kg															*2 270	1 860	14 175
	-3.0 m kg															*1 370	*1 370	13 736
	-4.5 m kg															*740	*740	13 109
	-6.0 m kg															*790	*790	12 265
	-7.5 m kg															*830	*830	11 154
-9.0 m kg															*1 320	1 210	9 684	
-10.5 m kg															*900	*900	7 643	

Notes: 1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities. 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards. 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.

EQUIPMENT.

STANDARD EQUIPMENT

Engine

Turbocharged, 4 stroke diesel engine with water cooling, direct injection and charged air cooler

Air filter with indicator

Air intake heater

Cyclone pre-cleaner

Fuel filter and water separator

Alternator, 80 A

Electric/Electronic control system

Contronics

Advanced mode control system

Self-diagnostic system

Caretrack and 3yr-Caretrack subscription

Machine status indication

Engine speed sensing power control

Automatic idling system

One-touch power boost

Safety stop/start function

Adjustable LCD color monitor

Master electrical disconnect switch

Engine restart prevention circuit

High-capacity halogen lights:

Frame-mounted 2

Boom-mounted 2

Batteries, 2 x 12 V / 150 Ah

Start motor, 24 V / 5.5 kW

Hydraulic system

Automatic sensing hydraulic system

Summation system

Boom priority

Arm priority

Swing priority

ECO mode fuel saving technology

Boom, arm and bucket regeneration valves

Swing anti-rebound valves

Boom and arm holding valves

Multi-stage filtering system

Cylinder cushioning

Cylinder contamination seals

Auxiliary hydraulic valve

Automatic two-speed travel motors

Hydraulic oil, ISO VG46

Frame

Access way with handrail

Tool storage area

Punched metal anti-slip plates

Under cover

Cab and Interior

Travel pedals and hand levers

Adjustable operator seat with heater and joystick control console

Control joysticks

Heater & air-conditioner, automatic

Flexible antenna

AM/FM stereo with CD player, MP3 and USB input

Control lock out lever

Cab, all-weather sound suppressed, includes:

Cup holders

Door locks

Tinted glass

Floor mat

Horn

Large storage area

Pull-up type front window

Removable lower windshield

Seat belt

Safety glass

Windshield wiper with intermittent feature

Master key

Sun screens, front, roof, rear

Undercarriage

Under cover

Hydraulic track adjusters

Greased and sealed track link

Track Guard

Digging equipment

Linkage

OPTIONAL EQUIPMENT

Engine

Block heater: 120 V, 240 V

Oil bath pre-cleaner

Diesel coolant heater, 5 kW

Water separator with heater

Auto engine shutdown

Fuel filler pump, 35 lpm, 50 lpm with automatic shut-off

Electric

Extra work lights:

Cab-mounted 3 (front 2, rear 1)

Counterweight-mounted 1

Travel alarm

Anti-theft system

Rotating warning beacon

Hydraulic system

Hose rupture valve: boom, arm

Overload warning device

Boom float function with HRV

Boom float function without HRV

Hydraulic piping:

Work tool management system (up to 20 programmable memories)

Hammer & shear, 1 and 2 pump flow

Hammer & shear: variable flow and pressure pre-setting

Additional return filter

Slope & rotator

Grapple

Oil leak (drain) line

Quick coupler piping

Volvo hydraulic quick coupler S1, S1 without hook

Volvo hydraulic quick coupler U21

Hydraulic oil, ISO VG 32, 68

Hydraulic oil, longlife oil 32, 46, 68

OPTIONAL EQUIPMENT

Cab and interior

- Silicon oil and rubber mounts with spring
- ROPS (ISO12117-2) certified cab
- Fabric seat without heater
- Fabric seat with heater and air suspension
- Control joysticks with semi-long
- Control joysticks with 3 switch & 1 proportional
- Pilot control pattern change
- Straight travel pedal
- Opening top hatch
- Cab-mounted falling object guard (FOG)
- Cab-mounted falling object protective structure (FOPS)
- Smoker kit (ashtray and lighter)
- Safety net for front window
- Front rain shield
- Sun shield, roof hatch (steel)
- Lower wiper with intermittent control
- Anti-vandalism kit
- Rear view camera
- Specific key

Undercarriage

- Full track guard

Track shoes

- 500/600/700/800/900 mm with triple grousers
- Track shoes 600 mm HD with triple grousers
- Track shoes 700 mm with double grousers

Frame

- Rear view mirror on counterweight
- Full height counterweight:
 - 3 700kg, 4 200kg
 - 4 900kg for long reach

Digging equipment

- Boom: 5.7 m monoblock, 8.85 m long reach
- Arm: 2.0 m, 2.5 m, 2.9 m, 3.5 m
- Arm: 6.25 m, long reach
- Linkage with lifting eye

Service

- Tool kit, daily maintenance
- Tool kit, full scale

SELECTION OF VOLVO OPTIONAL EQUIPMENT

X1 electrical pedal



Diesel coolant heater



Long life hydraulic oil



Additional working lights



Rearview camera



Oil bath pre cleaner



VOLVO CONSTRUCTION EQUIPMENT

Volvo Construction Equipment is different. Our machines are designed, built and supported in a different way. That difference comes from an engineering heritage of over 180 years. A heritage of thinking first about the people who actually use the machines. About how to help them be safer, more comfortable, more productive. About the environment we all share. The result of that thinking is a growing range of machines and a global support network dedicated to helping you do more. People around the world are proud to use Volvo.

Not all products are available in all markets. Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.

VOLVO

Volvo Construction Equipment
www.volvoce.com

Ref. No 20035507-B
2013.05
Volvo, Global Marketing

English-30
EXC