

V O L V O



Volvo Articulated Haulers 45.0 t 57 km/h 516 hp

A50

Volvo Construction Equipment

A50

With a new 45-tonne payload, the all-new A50 Volvo Articulated Hauler takes the proven full suspension concept to the next level.



Proven full hydraulic suspension concept



- Faster cycle times
- More productivity
- Reduction in fleet size
- Reduction in cost per tonne and cost of ownership



45-tonne payload

- 10% more productivity compared to previous generation A45GFS
- 8% more fuel efficiency compared to previous generation A45GFS
- New Volvo drivetrain
- Reinforced axles

A class of its own

The A50 takes the proven Volvo full suspension concept to new heights with a 45-tonne payload, adding a completely new class of machine to the Volvo Articulated Hauler range. When working over rough terrain such as quarries, mines and large constructions sites, look no further than the A50 for faster cycle times, optimum efficiency and superior operator comfort.

Intuitive in-cab interface




- All essential in-cab information conveniently displayed on just two screens
- Interactive, integrated Volvo Co-Pilot display
- Dynamic instrument cluster in-front of steering wheel

A new level in operator comfort



- Easy access/egress
- Direct field of vision which exceeds industry standards
- Lighting and cameras
- Enhanced storage options
- Easy cleaning
- Range of suspension configurations

Unbeatable off-road performance



- Volvo Automatic Traction control (ATC) with Terrain Memory
- Automatic drive combinations including 6x6 and 6x4
- All-terrain bogie
- Hydro-mechanical steering
- Downhill speed control
- Dynamic and predictive gear selection
- Superior tipping stability

5% reduction in service costs



- 250-hour greasing intervals
- Industry leading service access
- Remote monitoring and service alerts
- Enhanced electrical service center
- Service contracts

Haulers and beyond



- Haul Assist with On-Board Weighing
- Connected Map and Performance Indicator
- Future proofed software architecture
- Connected to Uptime
- Operator Training Program
- Service contracts
- Optimal pass-matching with Volvo loading tools

Proven full hydraulic suspension concept



- Faster cycle times
- More productivity
- Reduction in fleet size
- Reduction in cost per tonne and cost of ownership

Intuitive operator interface

Operators can stay in-the-know and focussed on the task at hand thanks to all essential in-cab information conveniently displayed on just two screens. The interactive, integrated Volvo Co-Pilot display offers easy control over essential functions like radio, camera settings, climate control, and machine status. This is combined with the dynamic instrument cluster, positioned in front of the steering wheel, which provides essential vehicle data at a glance.

New Volvo transmission

Unlock full power in all gears thanks to the new Volvo transmission and axles for more power and productivity in your daily operations. With the new Volvo drivetrain, Volvo DNA runs throughout the entire machine resulting in more fuel efficiency, more productivity and Volvo-renowned quality and reliability.

Updated full hydraulic suspension

With extended axle distance, better dynamics and improved geometry, the A50 can manage an increased 45-tonne payload, all while maintaining a comfortable ride and putting less stress on the components, for greater durability and longevity.

Proven full suspension concept

When compared to an equivalent standard suspension machine, the full suspension concept offers a dramatic improvement in cycle times. Faster cycle times result in an increase of hauler production per operating hour, as well as the possibility of a reduction in fleet size and reduction in cost per tonne and cost of ownership. What's more the A50 delivers 10% more productivity when compared to the previous generation A45GFS.

45-tonne payload

Make your operation more productive than ever before with a new 45-tonne payload. The new Volvo transmission and reinforced axles take the already outstanding levels of productivity you expect from a Volvo articulated hauler to new heights.



5% reduction in service costs

Reduce service costs by up to 6% over 12 000-hours of operation thanks to simplified servicing, longer change intervals and easy component access. Benefit from industry leading greasing intervals of 250 hours for maximum uptime.

Unbeatable off-road performance

The A50 delivers unbeatable off-road performance in its class with features including the proven Volvo drivetrain, automatic drive combinations (including 100% differential locks), all-terrain bogie and hydro-mechanical steering for unmatched traction, stability and precision control. With Volvo Dynamic Drive, dynamic and predictive gear selection adapts to the operating conditions at hand, for improved comfort and fuel efficiency.



Volvo A50 in detail

Engine

16 liter, 6-cylinder straight turbocharged diesel engine with 4 valves per cylinder, overhead camshaft and electronically controlled unit injectors. The engine has wet replaceable cylinder liners and replaceable valve guides and valve seats.

Engine model	Volvo	D16F
Max power - SAE J1995 Gross	kW	385
	hp	523
at engine speed	r/min	1 900
Max torque - SAE J1995 Gross	Nm	2 750
at engine speed	r/min	1 100
Displacement	l	16.1

Electrical system

All cables, sockets and pins are identified. Cables are enclosed in plastic conduits and secured to main frame. Prewired for options. Connectors meet IP67 standard for water-proofing as necessary

Voltage	V	24
Battery	V	2 x 12
Battery capacity	Ah	2 x 225
Alternator	kW/A	3.396 / 120
Starter motor	kW	9

Drivetrain

Torque converter with built-in lock-up function.

Transmission: Fully automatic Volvo PowerTronic planetary transmission with nine forward gears and three reverse gears. The transmission has the ability to skip gears for fast and accurate gear selection.

Dropbox: Volvo-developed, in-line design with high ground clearance and 100% longitudinal «dog clutch» type differential lock.

Axles: Heavy duty, purpose built Volvo design with fully floating axle shafts, planetary type hub reductions and 100% dog clutch type diff-lock. Automatic traction control system (ATC).

Torque converter		2,0:1
Transmission	Volvo	PT 3209
Dropbox	Volvo	IL2 ATC
Axles	Volvo	ARB50

Brake system

Fully hydraulic, wet multiple disc brakes with enclosed, forced oil-cooled discs on all wheels. Two circuit brake system. Complies with ISO 3450 at total machine weight.

Circuit division: One circuit for front axle and one for bogie axles.

Parking brake: Spring-applied disc brake acting on the trailer unit propeller shaft. When the parking brake is applied, the longitudinal differential locked.

Retarder: Service brake retarder function and Volvo Engine Brake (VEB).

Steering system

Hydro-mechanical articulated steering, self compensating design. Two double-acting steering cylinders.

Steering angle: 3,4 steering wheel turns lock-to-lock, $\pm 45^\circ$.

Steering system: including secondary steering fulfills ISO 5010.

Chassis

Frames: box type, heavy duty. High strength steel, robot welded.

Rotating hitch: 100% maintenance free, fully sealed, with permanently greased tapered roller bearings

Cab

Mounted on rubber pads. Ergonomically designed. Unobstructed wide angle forward view. Operator centrally positioned above the front axle. ergonomically positioned controls.

Electronic controlled climate unit with automatic controlled temperature and functionality with high thermal comfort and clean air.

The controls, switches, and instruments in the cab of the hauler machine are designed with a strong focus on ergonomics and the appropriateness of information content for the operator. These elements are strategically placed to provide operators with intuitive access to critical functions while minimizing distractions. Ergonomics play a pivotal role in the design, ensuring that controls are within easy reach and that their layout minimizes operator fatigue during long shifts. The primary 8» display, positioned directly in front of the operator, serves as a central hub for monitoring vital machine functions, displaying information in a clear and organized manner. The 12» secondary display complements this by enhancing situational awareness. The information presented on these displays is carefully curated to deliver the most pertinent data, alerts, and notifications, enabling operators to make informed decisions swiftly and accurately.

Safety: ROPS/FOPS standards approved according to ISO3471, SAE J1040 / ISO3449, SAE J231.

Sound level in cab (ISO 6396) - L _{PA}	dB	72
External sound level (ISO 6395) - L _{WA}	dB	112

Internal sound level with sound kit: 70 dB(A)

External sound level with sound kit: 110 dB(A)



Hydraulic system

Four variable displacement piston pumps driven by the flywheel PTO. Two load-sensing used for steering and tipping and two electrical controlled used for fan, brake cooling and brake power supply. One ground-dependent piston pump for secondary steering mounted on the dropbox. Two return oil filters with magnetic cores provide effective oil filtration

System max working pressure	MPa	28
Full suspension system max pressure	MPa	14

Dumping System

Patented Load and Dump Brake.

Dumping Cylinders: two single stage double acting cylinders.

Tipping angle	°	69
Tipping time with load	s	12
Lowering time	s	10

Body

Plate thickness

Front	mm	8
Sides	mm	11
Bottom	mm	14
Chute	mm	16

Material	HB450 steel	
Yield strength	N/mm ²	1 150
Tensile strength	N/mm ²	1 350

Load Capacity

Standard Body

Load capacity	kg	45 000
Body, struck	m ³	21.5
Body, heaped 2:1	m ³	27.8

With overhung tailgate

Body, struck	m ³	22.1
Body, heaped 2:1	m ³	29.2

Suspension

Unique, full hydraulic, on all wheels with automatic leveling and stabilizer. Part of the machine's hydraulic system, uses the same hydraulic oil.

Hydraulic cylinders (struts), front/rear	2/4
Accumulators, oil-nitrogen, high pressure, front	2
Accumulators, oil-nitrogen, high/low pressure, rear	2/2
Levelling sensors	2+2+2



Specifications

REFILL CAPACITIES		
		A50J
Crankcase	l	54
Fuel tank	l	563
Cooling system	l	55
Brake cooling system	l	133
Transmission	l	50
Dropbox	l	9
Axles, front/bogie	l	26/53
Hydraulic tank	l	199





SPEED		
		A50J
Forward		
1	km/h	6.2
2	km/h	8.6
3	km/h	12.5
4	km/h	17.0
5	km/h	21.5
6	km/h	26.7
7	km/h	36.0
8	km/h	46.4
9	km/h	57.0
Reverse		
1	km/h	6.0
2	km/h	8.2
3	km/h	16.3

OPERATING WEIGHT UNLOADED		
		A50J
Tires		875/65R29
Front	kg	17 330
Rear	kg	16 170
Total	kg	33 500
Payload	kg	45 000

Operating weight includes all fluids and operator

TOTAL WEIGHT		
		A50J
Tires		875/65R29
Front	kg	23 210
Rear	kg	55 280
Total	kg	78 490

GROUND PRESSURE		
		A50J
Tires		875/65R29
Unloaded		
Front	kPa	103
Rear	kPa	48
Loaded		
Front	kPa	138
Rear	kPa	163

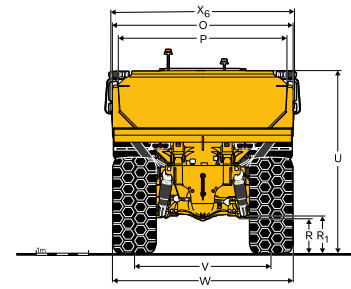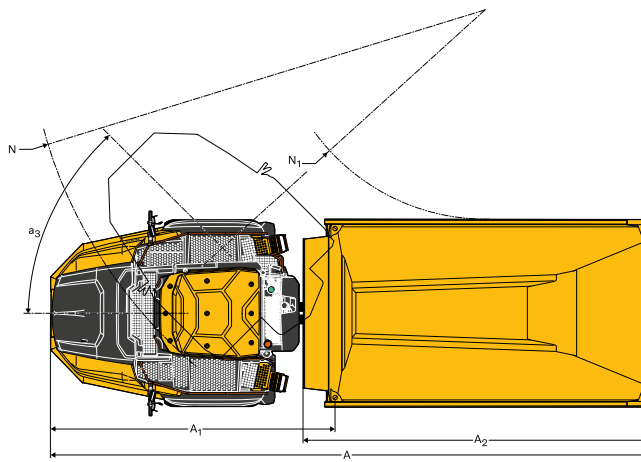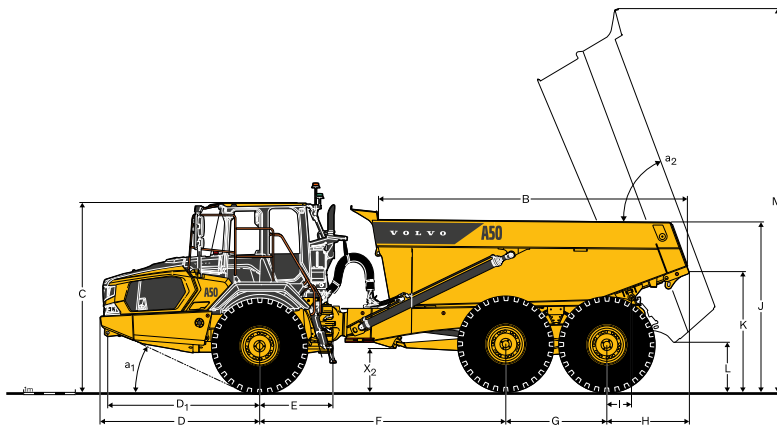

DIMENSIONS		
Pos	Unit	A50J
A	mm	11 399
A ₁	mm	5 429
A ₂	mm	6 558
B	mm	5 998
C	mm	3 624
C ₁	mm	1 819
D	mm	3 084
D ₁	mm	2 941
E	mm	1 277
F	mm	4 768
G	mm	1 940
H	mm	1 609
I	mm	494
J	mm	3 249
K	mm	2 426
L	mm	944
M	mm	7 525
N	mm	9 394
N ₁	mm	4 480
O	mm	3 581

DIMENSIONS		
Pos	Unit	A50J
P	mm	3 375
Q	mm	3 093
R	mm	627
R ₁	mm	645
S	mm	2 845
T	mm	3 441
U	mm	3 572
V	mm	2 710
W	mm	3 570
X	mm	578
X ₁	mm	663
X ₂	mm	815
Y	mm	2 710
Z	mm	3 570
a ₁	°	25,5
a ₂	°	69
a ₃	°	45

A50J: Unloaded machine with 875/65R29 tires.

Equipment

STANDARD EQUIPMENT

Cab/Operator envioment

Operator seat with head restraint (air suspended and heated)

Electronic Climate Control

Cup holder / storage tray

Cell phone holder

Instructor seat with seat belt

Overhead console for CC Radio, Tachograph, etc.

Air suspended / heated operator seat

Sliding window

Cooled / Heated storage box

Front sun visor

Tilt/telescopic steering wheel

Loud speakers (4)

Dynamic instrument cluster and integrated Co-Pilot

Automatic pre-start checks

Troubleshooting diagnostics

Engine

Preheater for easier cold starts

VEB (exhaust retarder EPG + compression brake)

Wheels and tires

875/65R29

Electric powertrain

6x4 and 6x6 Automatic Traction Control (ATC)

Dog clutch type 100% diff-locks in all axles

Cruise Control

Dropbox with longitudinal diff-lock

Torque converter with automatic lock-up in all gears

Long haul kit, dropbox cooling

Electrical system

Battery disconnect switch

Electrical Interface

Charging studs

Power outlets

USB-C 2.0 (2)

USB-A 3.0 (1)

24V (2)

Exterior and Interior lights (all LED)

Suspension

Hydraulic front & rear suspension

Brake system

Two circuit, fully hydraulic, wet discs on all axles (externally cooled)

Down Hill Speed Control

Hill assist

Load & Dump Brake

Retarder pedal

Parking brake on propeller shaft

STANDARD EQUIPMENT

Dumping System

Body prepared for exhaust heating and optional equipment

Safety

Anti-slip steps and platforms with handrails

Dump body lock

Steering joint lock

Harness anchor points

Rear-view mirrors

Retractable 3-inch 2-point safety belt

ROPS / FOPS protected Care Cab

Secondary steering

Dump support system

Positioning indicators (front and rear)

Entrance camera

Service and Maintenance

Grouped service points and filters

Electrical fuel priming pump

Prepared for fast fueling equipment

Ambient and service lights (LED)

Electrical engine hood

Belly plate with integrated service hatches

Drainage hoses

Tool box

Front service ladder

OPTIONAL EQUIPMENT
Engine
Air filter, heavy duty
Engine heater, electric
Engine heater, diesel
Engine shutdown timer
External emergency engine stop
Operator Environment
Noise reduction kit (fulfils 2000/14/EC)
Anchorage, operator's manual
Cab heating / ventilation timer
Cable kit, for cab heater
Cab air filter (Asbestos dust protection)
Cab air filter (Carbon)
Rear view mirrors, adjustable, el.heated
Sun blinds, side windows
Universal key
Premium operator seat with head restraint (air suspended, cooled / heated), 2-point belt
Premium operator seat with head restraint (air suspended, cooled / heated), 3-point belt
Armrest for operator seat
Hands-free microphone
Radio AM / FM / DAB
Drivetrain
Speed limiter (25/30 km/h)
Electrical system
Warning beacon, LED
Seatbelt indicator, external
Working lights front and rear, LED
Rear view camera
Front view camera
Reverse alarm
PDS interface, Safemine
Tire Pressure Monitoring System

OPTIONAL EQUIPMENT
Dumping System
Body exhaust heating
Front spillguard, extra
Side extension, 200 mm
Side extension, 400 mm
Side extension, light material
Tailgate, overhung, wire-operated
Tailgate, overhung, linkage-operated
Tailgate, underhung
Wear plates, 450 HB
Wear plates heavy duty, 450 HB
Safety and security
Fire suppression system
Warning triangle
First aid kit and fire extinguisher
Fire extinguisher, external
Wheel chocks
Service and maintenance
Auto Lube system
Centralized greasing
Tool kit
Other
Arctic oil kit
Fast fuelling system
Jump start connector, ISO-type

Our Branches



Albany

17 Charles St
Milpara, WA, 6330
Tel 08 9841 1249

Alice Springs

12 Cameron Street
Braitling, NT 0870
Tel 08 8959 0500

Bibra Lake

1/1 Discovery Drive
Perth, WA, 6163
Tel 08 9359 7480

Brisbane

32-36 Colebard St East
Acacia Ridge, QLD 4110
Tel 07 3276 3700

Bunbury

10 Kerr Rd
Picton East, WA 6229
Tel 08 9722 8100

Burnie

44 Main Rd
Wivenhoe, TAS 7320
Tel 03 6431 7833

Canberra

40 Yass Road
Queanbeyan, NSW 2620
Tel 02 4648 9651

Dandenong

46 Greens Rd
Dandenong, VIC, 3175
Tel 03 9767 8000

Darwin

1 Toupein Rd
Yarrawonga, NT, 0830
Tel 08 8935 9100

Forrestfield

787 Abernethy Road
Forrestfield, WA, 6058
Tel 08 9359 7400

Geelong

106 St Georges Rd
Corio, VIC 3214
Tel 03 6262 6220

Geraldton

383 Edward Rd
Meru, WA, 6530
Tel 08 9960 8000

Guildford

52 Great Eastern Highway
South Guildford, WA, 6055
Tel 08 9277 0111

Hobart

56 Crooked Billet Dr
Bridgewater, TAS, 7030
Tel 03 6262 6200

Kalgoorlie

85 Craig Rd
Kalgoorlie, WA, 6430
Tel 08 9080 0500

Launceston

401 Westbury Rd
Prospect Vale, TAS, 7250
Tel 03 6345 4100

Mackay

Connors Rd
Paget, QLD, 4740
Tel 04847 7300

Melbourne

210 Northbourne Rd
Campbellfield, VIC, 3061
Tel 03 9305 9900

National

54 Great Eastern Highway
South Guildford, WA, 6055
Tel 08 9478 0000

Newcastle

2 Glenwood Dr
Thornton, NSW, 2322
Tel 02 4926 9600

Sydney

10 Anzac Ave
Smeaton Grange, NSW, 2567
Tel 02 4648 9600

Port Hedland

17 Pinnacles St
Wedgedield, WA, 6721
Tel 08 9140 0200

Rockhampton

1 Featherstone Street,
Parkhurst, QLD, 4702
Tel 07 4847 7330

Wodonga

2A Stead St
Wodonga, VIC, 3690
Tel 02 6092 2200